


Habitec Security Qolsys IQ2+

Operating Instructions

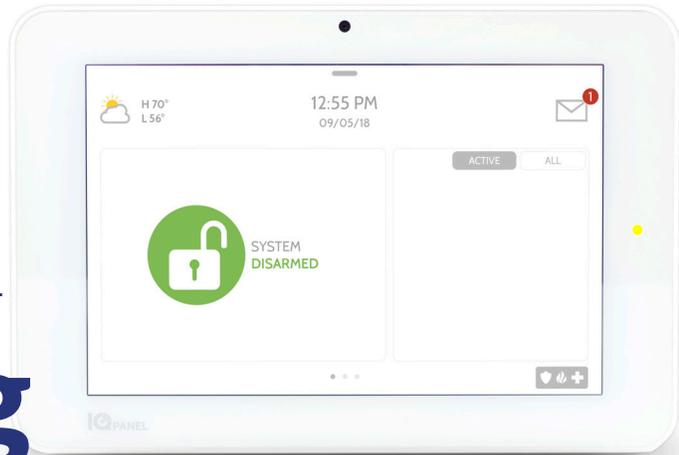

About Your System

The Habitec Security Qolsys security system's burglary protection can be armed or disarmed as needed; while monitoring for environmental, CO, fire, medical, and police emergency conditions 24-hours a day. Most system functions explained below can also be completed from your Alarm.com app on your smart phone.

Video Tutorials

There are built in video help guides for the most common functions of your security system.

- Access your message center by touching the icon in the upper right corner. Once it's open you'll see three sections: **Contact, Video Tutorials, and Messages/Alerts/Alarms**
- Press **Video Tutorials**
- Watch videos to help you understand your system and service better.
- To watch a video, touch a thumbnail. Video will begin playing automatically.

False Alarm

In the event there is a false alarm, please contact Habitec's Central Station immediately at 419-537-9100. Please have your verification password ready.

- Store the **Habitec Security Central Station** phone number listed above in your phone as a contact so there is no missed calls during alarm events.

Arming the System (Away/Stay):

- Press the **unlock icon**
- Press the **arm stay** or **arm away locked icon**
 - **Arm Away** will arm the entire system
 - **Arm Stay** will arm the perimeter and leave the motions off

Disarming The System

- Enter your code
 - You will hear an entry tone reminding you to disarm the system when you are entering.
 - Upon disarming from the keypad, your Qolsys has a built-in camera that will take a snapshot of whomever disarmed the system.

Fire/Medical/Police

- Touch the panic icon on the bottom right of the keypad
- Then push the appropriate icon for help
 - These emergency buttons are active 24 hours a day.

Reset Alarm Activation (Loud Siren)

- Touch the screen
- Enter your code
- **CALL THE CENTRAL STATION**, identify yourself; using your name and password to verify that you are secure and the alarm was accidental.

Bypassing a Zone

- Press the > **arrow** (to the right of the Arm Away icon) to expand the display
- On the top right of the screen, press **ALL**
 - A list of your zones will appear
- Select the zones to be bypassed
- Press either **Armed Stay** or **Armed Away**

Adding a User

- Swipe down on the screen to access the settings tray
- Press **Settings**, then **Advanced Settings** and enter the Master Code
- Select **User Management** Then **Add User**
 - Once on the “**Add User**” screen you can create a custom name and user code and indicate whether you want this person to be a Master, User, or Guest
- Press **Add User** to finish then press **Back** or **Home** to exit.

Editing a User Code

- Swipe down on the screen to access the settings tray
- Press **Settings**, then **Advanced Settings** and enter the Master Code
- Select **User Management** then press the **Pencil Icon** for the user you want to edit
- Press **Save** after you have completed your changes
- Press the **Home Icon** to return to the main screen

Deleting a User

- Swipe down on the screen to access the settings tray
- Press **Settings**, then **Advanced Settings** and enter the Master Code
- Select **User Management** then press the **Trash Can Icon** for the user you want to delete
- Press **Ok** to confirm
- Press the **Home Icon** to return to the main screen